

A ROBUST SEMI-MIXED 4-NODE SHELL ELEMENTS WITH ASSUMED ASYMMETRIC STRAINS AND STRESS RESULTANTS

UODwt | { unk³. 'lEj t» ekngy unk³. 'MOF cu| mky le| ³"cp f "Y OY kmqy unk³

³Faculty of Civil and Environmental Engineering, Gdańsk University of Technology,
e-mail: kardasz@pg.edu.pl

1. Introduction

6/pqf g" uj gm' hpkkg" grgo gpvu" ctg" eqo o qpnf " wugf " kp" pqrpkpget" cpcnf uku" qh" uj gm' utwewtgu0' Ucpf ctf " f kur mego gpv'uj gm'grgo gpw'y kj "hwmf "kpvgi tcvgf "o cvtkegu"ctg"r tqpg"vq"uj gct"cpf "o go dtepg"mqenki "cpf "vj g" r tqdrgo "qh'ur wtkwu" gtq"gpgti { "o qf gu"cr r gcty"y kj "tgf wegf "kpvgi tcvkp0Cngtpevkgm". j { dtkf "o kzgf "hpkkg" grgo gpvu"dcugf "qp"o wnk/hgrf "xctkcvkpcnr tpekr ngu"o c { "dg"wugf 0Vj g'hqt o wrcvqp"qh'ghgevkxg"uj gm'grgo gpv' r m { u'et wekn'tqrg"kp"hcuv'cpf "ceewtcev"cpnf uku"qh'eqo r rnz"uj gm'utwewtgu0'K'y cu'uj qy p"kp"r cr gtu"j3.4_"vj cv' o kzgf "grgo gpvu" f gxnqr gf "htqo " vj g"5/hgrf "J wY cuj k w'hwpevkpcnr cmqy "hqt" xgt { "rti g" rcf "uwr u" kp" eqo r ctkuq" vq" qj g" grgo gpvu' Vj g" r tguqpv' ugo k'o kzgf "grgo gpvu" ctg" f gxnqr gf "kp" vj g"htco gy qtm' qh' c" pqrpkpget"8/r ctco gvg"uj gm'vj gqt { "j5_"y j g"vj g"tghgtpep"uwtceeg"ku" hqt o cmf "gs wxcngpv"vq"vj g"Equigtcv' uwtceeg'J gpeg." vj g" o gcuwtgu"qh' utckpu" cpf "tguwncpv' utguugu" ctg" cu{o o gvtke' Uqo g" ugo k'o kzgf "uj gm' grgo gpvu"y kj "cu{o o gvtke" cuwo gf "utguugu"y g" r tqr qugf "kp" j6_" { gv' hqt" f khtgtpv' uj gm'vj gqt { O'Y j kg" kpvtr qrcvqp"qh'cu{o o gvtke"utckpu"cpf "gpj cpegf "utckpu"y cu'f guetkdgf "kp" j7.8_0Tgegpv." ghgevkxg"o kzgf "uj gm'grgo gpv'y kj "cu{o o gvtke"kp' gr gpf gpv'hgrf u'qh'utckpu"cpf "utguu'tguwncpv'y g" r tqr qugf "kp" j9.:_0 J g" g" vj g" r tgrko kpct { 'tguwnu' hqt' tqdwu'5/hgrf "ugo k'o kzgf "grgo gpvu"ctg" r tguqpv' dcugf "qp" j: _0

2. Element formulation

Vj g"ugo k'o kzgf "grgo gpvu"y g"tg" f gxnqr gf "dcugf "qp"o qf hkgf "5/hgrf "J wY cuj k w'hwpevkpcnr0'K"vj g"grgo gpv' hqt o wrcvqp" qpnf " o go dtepg" cpf " uj gct" eqo r qpgpw" qh' utckpu" cpf " tguwncpv' utguugu" y g"tg" vtgcvgf " cu" kp' gr gpf gpv'0Vj g'eqo r qpgpw'qh'cuwo gf "utguu'tguwncpv'y g"tg"kpvtr qrcvqf "kp"vj g'hqmjy kpi "y c { ""

$$*3+\bar{N}_C^{33} = \alpha_3 + \alpha_4 \xi_4. \quad \bar{N}_C^{44} = \alpha_5 + \alpha_6 \xi_3. \quad \bar{N}_C^{34} = \alpha_7. \quad \bar{N}_C^{43} = \alpha_8. \quad \bar{Q}_C^3 = \alpha_9 + \alpha_{32} \xi_4. \quad \bar{Q}_C^4 = \alpha_{33} + \alpha_{32} \xi_3. \\ *4+\bar{N}_D^{33} = \alpha_3 + \alpha_4 \xi_4. \quad \bar{N}_D^{44} = \alpha_5 + \alpha_6 \xi_3. \quad \bar{N}_D^{34} = \alpha_7 + \alpha_8 \xi_4. \quad \bar{N}_D^{43} = \alpha_9 + \alpha_{32} \xi_3. \quad \bar{Q}_D^3 = \alpha_{33} + \alpha_{34} \xi_3. \quad \bar{Q}_D^4 = \alpha_{33} + \alpha_{34} \xi_3.$$

y j g"tg" $\xi_a = \xi_a - \bar{\xi}_a$ "ctg"vj g"uq/ecmgf "eqttgevgf "pcwtn'eqqtf kpcvgu."ugg"j3_0'kpvtr qrcvqp"i kxgp"d { "*3+y cu" wugf "kp"UO Kz aC"grgo gpv.cpf "d { "*4+kp"UO Kz aD"grgo gpv'0Vj g'hktu'r ctv'qh'vj g'utckp'hgrf "y cu'kpvtr qrcvqf " kp"vj g'uco g"y c { "cu'vj g'utguu'hgrf ".y j kg"vj g"ugeqpf "r ctv'ceeqt f kpi "vq"GCU'hqt o wrcvqp."g0 0]8_0Vj g'CP U' cr r tqcej "j; _y cu'cr r rkgf "vq"vcpuxgtug"uj gct"eqo r qpgpw'qh'utckpu'0Vj g'eqpvcxctkcpv'twrg"y cu'wugf "f wtkpi " vcpuhqto cvkqp"qh'tguwncpv'utguugu"cpf "vj g'hktu'r ctv'qh'utckpu."y j kg"eqxctkcpv'twrg" hqt"vj g"ugeqpf "r ctv'qh' utckpu'0Vj g'r ctco gvgtu'hqt"cuwo gf "utguugu"cpf "utckpu"y g"tg"uvcvcmf "eqpf gpugf "cv'vj g'grgo gpv'ixgr0'

3. Results

Vj g" r tqr qugf "ugo k'o kzgf "grgo gpvu"j cxg" eqttgevg' tcpn' cpf "ucvuhf " kph'ur " eqpf kxqp" cpf " r cvej "vgu'0'Vj g" r gthqto cpeg"qh'grgo gpvu"UO Kz aC"cpf "UO Kz aD"y cu'kpxguki cvgf "d { "uqnxkpi "vj g"y gm'npqy p"pqrpkpget"vgu' qh'r kpej gf "j go kur j g"tg"y kj "c"j qrg'0Vj g"i gqo gvt { "cpf "o cvgtkn'f cwc"ctg" r tguqpv' "kp"Hi 03c0Hqmjy kpi "j4_" hqt'vko gu'uo cmgt"uj gm'vj kenggu" h"? 2023'y cu'cuwo gf "vq"o cmg'gzco r rnz"o qtg'r tqpg"vq"mqenki 0Vj g'tguwnu' hqt'ugo k'o kzgf "grgo gpvu"UO Kz aC"cpf "UO Kz aD"y g"tg"eqo r ctgf "y kj "vj g'tguwnu'hqt" hqmjy kpi "6/pqf g"uj gm' grgo gpvu"eqttgur qpf kpi "o kzgf "grgo gpvu"O Kz aC"cpf "O Kz aD"j9_" gpj cpegf "utckp"grgo gpv'GCP U6"j8_"cpf " ugo k'o kzgf "grgo gpv' Y 4; "j4_0Vj g'eqo r wgf "pqrpkpget" rcf /f ghgevkqp"ewtvgu"ctg" r tguqpv' "kp"Hi 03d0Vj g' eqpxgti gpeg'tcv'ku'eqo r ctgf "y kj "vj g'uqnvkpu"qdvkpgf "y kj "cngtpevkg'hqt o wrcvqp"kp"Vcdrg"30"

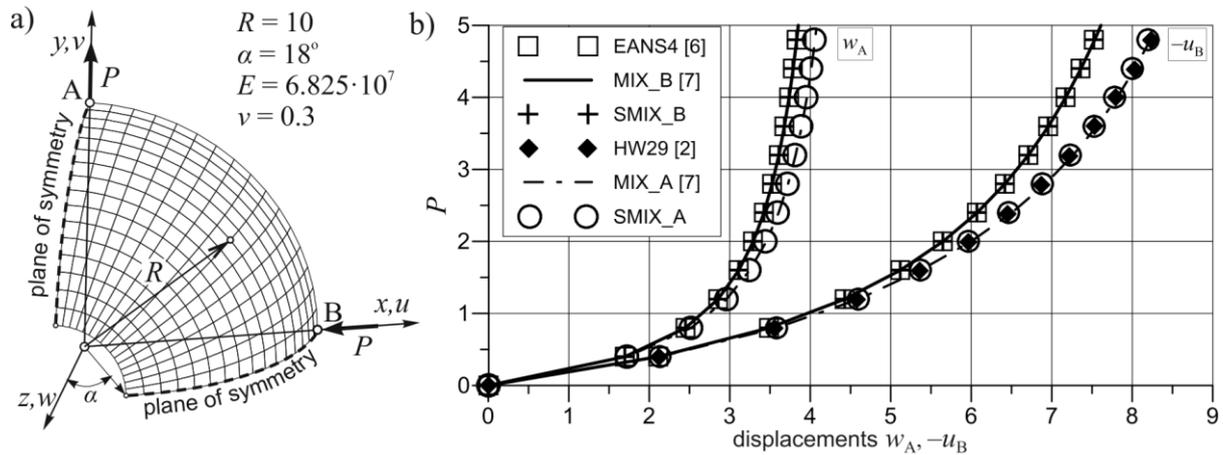


Figure 1: Pinched hemisphere with a hole, a) geometry, b) nonlinear equilibrium paths for 16×16 mesh.

Element	HW29	EANS4	MIX_A	MIX_B	SMIX_A	SMIX_B
Max ΔP	0.8	0.055	0.88	0.88	0.88	0.88
Total no. of iterations	61	518	30	38	33	36
CPU time [s]	-	856	32	40	28	31

Table 1: Comparison of maximum fixed load step ΔP , total number of iterations and process (CPU) time in nonlinear analysis for total load $P = 8.8$, 32×32 FE mesh (16×16 FE mesh for HW29).

4. Conclusions

The proposed semi-mixed shell elements require considerably less equilibrium iterations than elements EANS4 and HW29. The smaller number of independent parameters resulted in shorter CPU time than in the case of corresponding mixed elements [7]. The obtained equilibrium paths are in good agreement with the reference solutions. The element SMIX_B yield a slightly stiffer response than element SMIX_A.

Acknowledgments The research reported in this paper is supported by the National Science Centre, Poland with the grant UMO-2015/17/B/ST8/02190.

References

- [1] W. Wagner and F. Gruttmann. A robust non-linear mixed hybrid quadrilateral shell element. *Int. J. Num. Meth. Eng.*, 64:635–666, 2005.
- [2] K. Wisniewski and E. Turska. Four-node mixed Hu-Washizu shell element with drilling rotation. *Int. J. Num. Meth. Eng.*, 90:506–536, 2012.
- [3] J. Chróscielewski, J. Makowski and W. Pietraszkiewicz. *Statics and dynamics of multifold shells: Nonlinear theory and finite element method* (in Polish), IPPT PAN Press, Warsaw, 2004.
- [4] C. Sansour and H. Bednarczyk. The Cosserat surface as a shell model, theory and finite-element formulation. *Computer Methods in Applied Mechanics and Engineering*, 120:1–32, 1995.
- [5] C. Sansour and J. Bocko. On hybrid stress, hybrid strain and enhanced strain finite element formulations for a geometrically exact shell theory with drilling degrees of freedom. *Int. J. Num. Meth. Eng.*, 43:175–192, 1998.
- [6] W. Witkowski. 4-node combined shell element with semi-EAS-ANS strain interpolations in 6-parameter shell theories with drilling degrees of freedom. *Computational Mechanics*, 43(2):307–319, 2009.
- [7] J. Chróscielewski, S. Burzyński, K. Daszkiewicz and W. Witkowski. Mixed 4-node shell element with assumed strain and stress in 6-parameter theory. *Shell Structures: Theory and Applications Vol. 4*, Pietraszkiewicz & Witkowski (eds), Taylor & Francis Group, London, 2018.
- [8] K. Daszkiewicz. *A family of hybrid mixed elements in 6-parameter shell theory, geometrically nonlinear analysis of functionally graded shells, Doctoral Thesis* (in Polish), Gdańsk University of Technology, 2017.
- [9] E. Dvorkin and K.-J. Bathe. A continuum mechanics based four node shell element for general nonlinear analysis. *Engineering Computations* 1:77–88, 1984.